




トラック用サポーターの中に磁石




自動車用・トラック用に磁石とセラモパワー

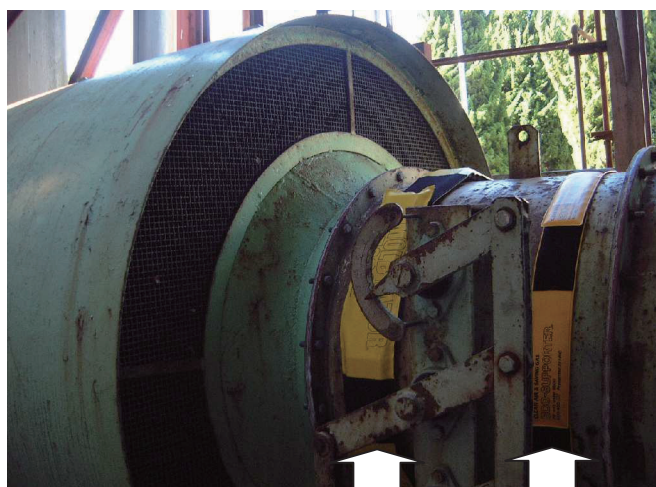

一次空気用ダクト配管

磁石

セラモパワー

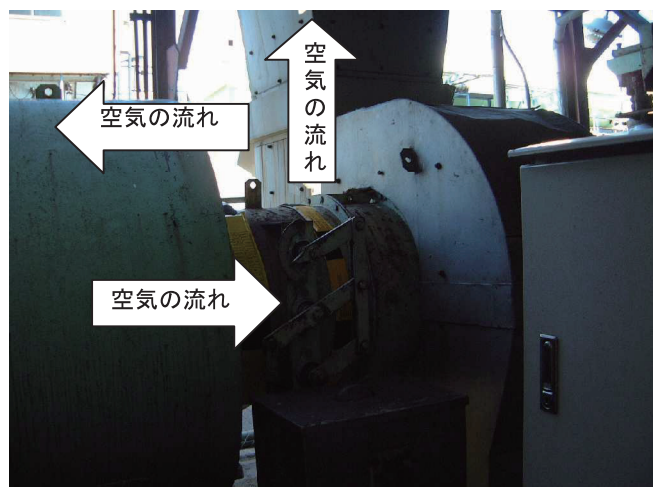

燃焼室までの空気の流れ



一次空気口全景(ボイラー)



蒸気配管、工場の敷地

主蒸気量	燃烧促進装置（セラモ社製）使用				燃烧促進装置（セラモ社製）未使用			
	蒸発倍率	O2	NOx	SOx	蒸発倍率	O2	NOx	SOx
20.5	16.0	3.9	79.0	42.0	15.5	3.7	79.0	47.0
20.7	16.0	3.9	76.0	41.0	15.5	3.7	79.0	47.0
20.8	15.6	3.7	78.0	40.0	15.5	3.7	79.0	47.0
20.9	15.6	3.7	77.0	42.0	15.5	3.8	78.0	47.0
21.0	16.0	3.8	77.0	41.0	15.5	3.8	78.0	47.0
21.2	15.8	3.7	78.0	43.0	15.5	3.8	78.0	47.0
21.4	15.9	3.7	77.0	43.0	15.5	3.8	78.0	47.0
21.7	16.0	4.2	77.0	41.0	15.5	3.8	78.0	47.0
21.8	15.9	3.6	77.0	43.0	15.5	3.8	78.0	47.0
21.9	15.6	3.7	80.0	40.0	15.5	3.8	78.0	47.0
22.4	15.9	3.7	78.0	43.0	15.5	3.8	78.0	47.0
22.5	15.7	3.6	80.0	46.0	15.5	3.8	78.0	47.0
22.6	15.9	3.7	78.0	44.0	15.5	3.8	78.0	47.0
22.7	15.7	3.5	81.0	48.0	15.5	3.8	78.0	47.0
22.8	15.7	3.5	79.0	42.0	15.5	3.8	78.0	47.0
23.0	15.7	3.6	79.0	42.0	15.5	3.8	79.0	48.0
23.2	15.7	3.6	78.0	42.0	15.5	3.8	79.0	48.0
23.3	15.7	3.6	82.0	47.0	15.5	3.8	79.0	48.0
23.4	15.7	3.6	76.0	38.0	15.5	3.8	79.0	48.0
23.5	15.6	3.4	81.0	48.0	15.5	3.8	79.0	48.0
23.6	15.6	3.3	79.0	43.0	15.5	3.8	79.0	48.0
23.7	15.6	3.3	79.0	43.0	15.6	3.5	78.0	45.0
平均	15.8	3.7	78.5	42.8	15.5	3.8	78.4	47.2
標準偏差	0.152	0.199	1.625	2.538	0.021	0.070	0.503	0.664

